

STANDARD PLUG DOOR WITH FRAME

DOOR SIZE = 34" X 76"

ROUGH OPENING = 38 3/4" X 78 5/8"

DOOR THICKNESS = 4"

FINISH:

INTERIOR: 26GA. STUCCO GALVALUME





EXTERIOR: 26GA. STUCCO GALVALUME

INSULATION: URETHANE

HINGE: LEFT/RIGHT

FRAME IS OVERLAP
DOOR IS FLUSH MOUNT

HEATER WIRE & THRESHOLD
INCLUDED IN FREEZER APPLICATIONS.

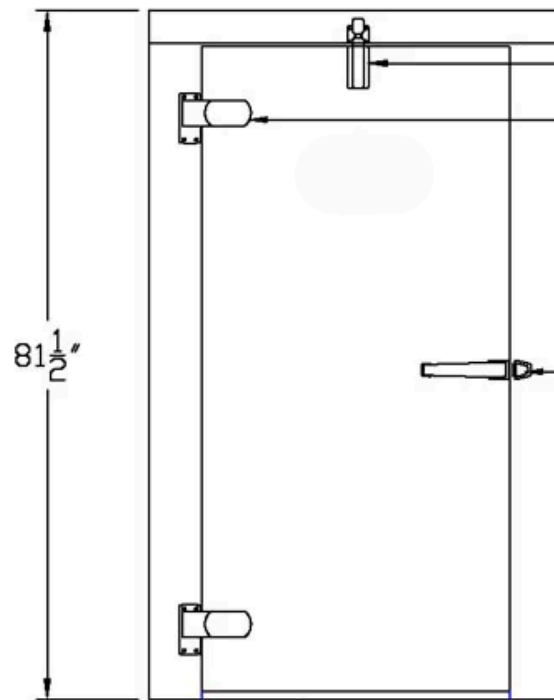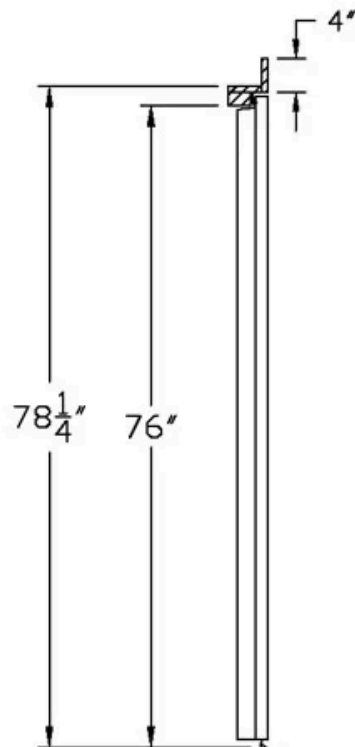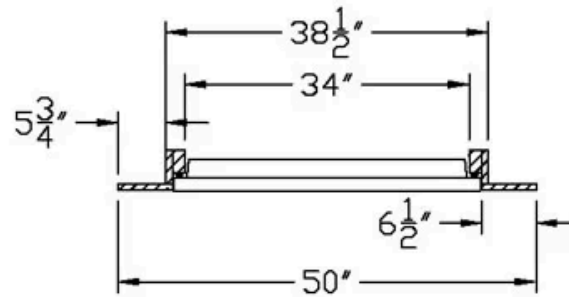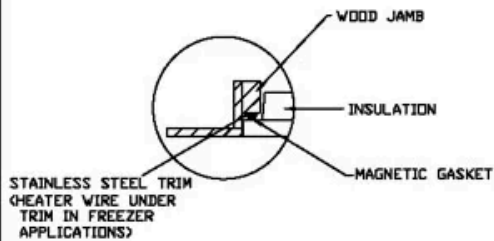

TRIPLE VINYL SWEEP

SPRING LOADED DOOR


ADJUSTABLE
SPRING LOADED HINGE


PLUG DOOR HANDLE
W/SAFETY RELEASE
ACCEPTS PADLOCK
BRUSHED CHROME
FINISH

TRIM: 3"x3" ANGLE WITH HEMMED EDGES
(2) 80 5/8"L (1) 42 3/4"L



PanelTX
201 S. 6th Street
Godley, TX 76044

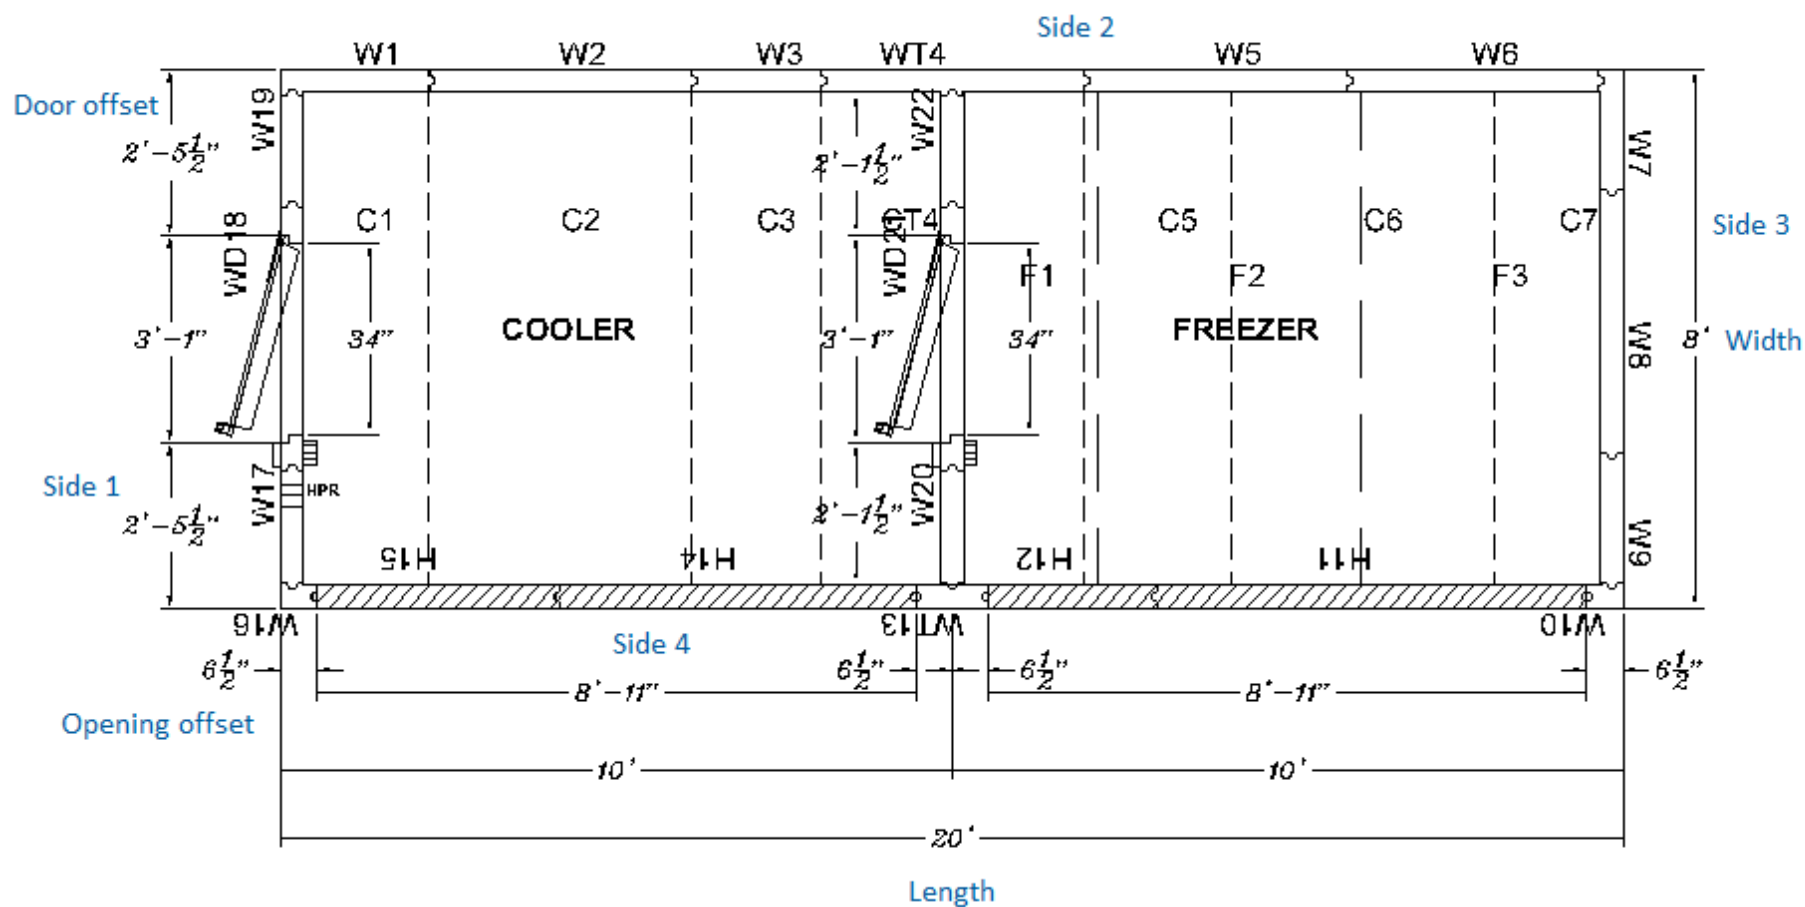

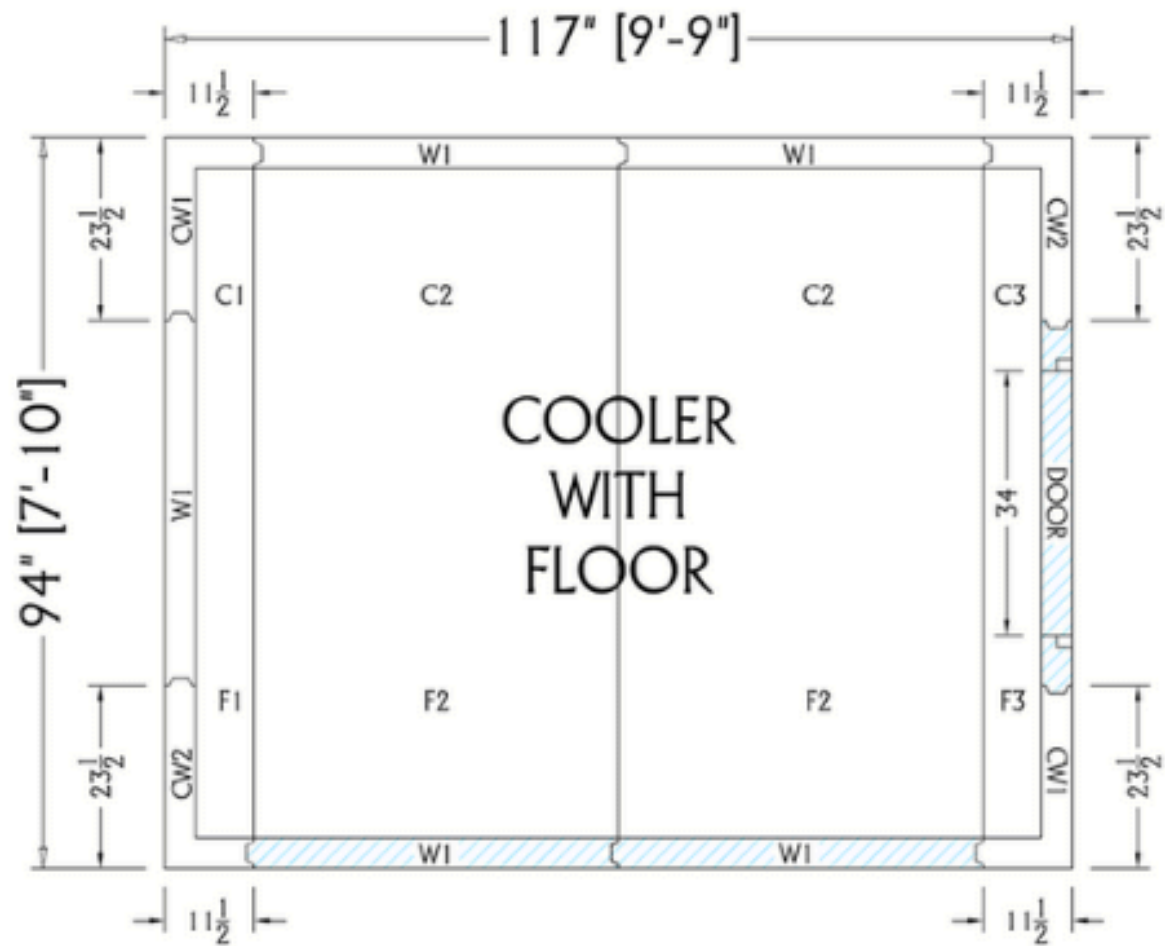

PANELTX

PanelTX

201 S. 6th Street
Godley, TX 76044